


Opportunity Charge Model	Max DC Volts	Max Start Amps Out	Max AC Amp Draw @ 480VAC	Approximate Ship Weight
24-510-310C	24	128	5	49
24-680-310C	24	170	7	49
24-765-330C	24	191	8	55
24-880-330C	24	220	9	55
24-935-320C	24	234	10	87
24-1045-320C	24	260	11	90
24-1190-320C	24	298	12	94
24-1445-320C	24	361	15	97
36-375-310C	36	94	6	43
36-510-310C	36	128	8	46
36-680-310C	36	170	10	49
36-765-330C	36	191	12	57
36-880-330C	36	220	13	57
36-935-320C	36	234	14	87
36-1045-320C	36	260	16	90
36-1190-320C	36	298	18	90
36-1360-320C	36	340	20	94
36-1445-320C	36	360	22	97
36-1680-320C	36	420	26	97
48-510-310C	48	128	11	49
48-595-330C	48	149	12	55
48-660-330C	48	165	13	55
48-765-320C	48	191	16	87
48-935-320C	48	234	18	87
48-1045-320C	48	260	21	90
48-1275-320C	48	319	25	90
48-1320-320C	48	330	26	90
72-255-330C	72	64	7	43
72-320-330C	72	80	9	46
72-400-330C	72	100	11	50
72-680-320C	72	160	19	55
72-800-320C	72	200	22	57
80-255-330C	80	64	9	43
80-320-330C	80	80	11	46
80-400-330C	80	100	13	55
80-510-320C	80	128	17	86
80-680-320C	80	160	22	86
80-800-320C	80	200	26	90

All standard SB connectors included in price, SB50, SB175, SB350

Euro style connectors, Schaltbau connectors are optional

- All prices are FOB, our facility, Piqua OH, freight allowed
- Shipments to Canada, Mexico, Alaska, Hawaii, and Puerto Rico are subject to export policy
- Terms are net 30 days
- Specifications and Pricing are subject to change without notice.

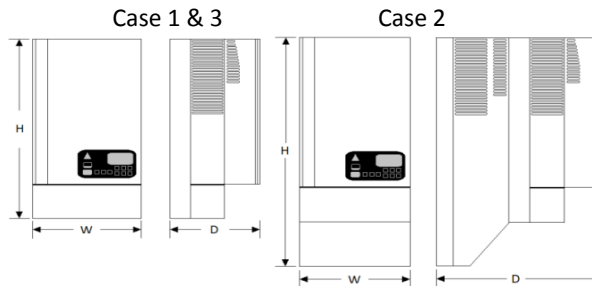

Enclosure	H	W	D
1 (8kW)	21"	10"	9"
2 (16kW)	25.75"	10"	19.25"
3 (10kW)	22.5"	10.5"	9.75"